



Hand Test Pump 2911: Pressure to +5 bar
Hand Test Pump 2941: Vacuum to -0,8 bar

2911
2941

Hand Test Pumps pneumatic operated

Type 2911:

generating pressure up to 5 (7) bar


Type 2941:

generating vacuum up to -0,8 (-0,9) bar

The hand test pumps 2911 and 2941 has been designed for easy to use pressure calibration equipment „in the field“, for testing pressure gauges, presure transmitters, pressure switches etc.

With volume adjuster, enabling fine pressure control, and bleeder valve.

The hand test pumps 2911 and 2941 are also very suitable for mbar ranges.

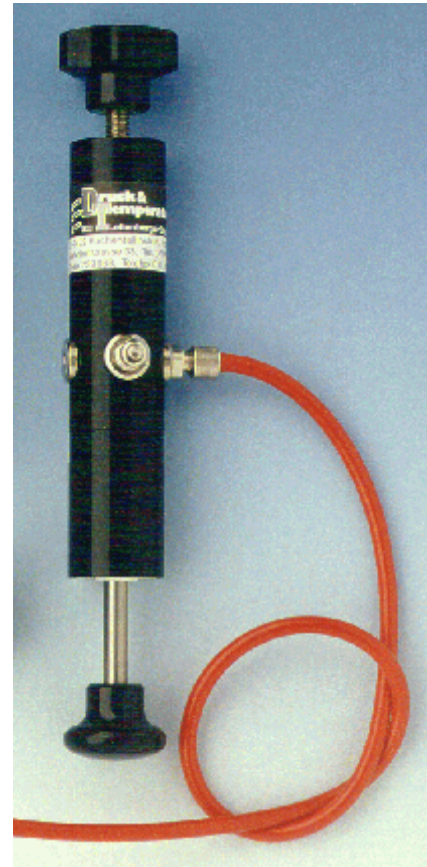

Standard Accessories:

- 300 mm tube
- T-coupling
- Operating manual

Optional Accessories:

- Carrying case with foams
- Suitable tube
- Additional t-couplings

Specification:

Type 2911 - Pressure generating:	0 to 5 bar (using the volume adjuster up to 7 bar)
Type 2941 - Vaccum generating:	0 to -0,8 bar (using the volume adjuster up to -0,9 bar)
Pressure connection:	for tube 4 / 6 mm
T-coupling:	Quick-coupling t-junction, for tube 4 x 6 mm For connection of a reference and a unit under test you need additional two pcs. tube
Volume Handpump:	appr. 20 cm ³
Volume Volume adjuster:	appr. 20 cm ³ , Revolution thread 1 mm
Weight:	appr. 400 g
Dimensions:	appr. 200 mm length, body appr. 35 mm diameter



DRUCK & TEMPERATUR Leitenberger GmbH
Bahnhofstr. 33 • D-72138 Kirchentellinsfurt • Germany
Tel.: 0 71 21 - 9 09 20 - 0 • Fax: 0 71 21 - 9 09 20 - 99
E-Mail: dt-info@leitenberger.de • <http://www.leitenberger.de>



DIN EN ISO 9001



Hand Test Pump 2911: Pressure to +5 bar
Hand Test Pump 2941: Vacuum to -0,8 bar

2911
2941

Available Types:

Type	Generating pressure up to	Order-Code
2911	to 5 (7) bar with pressure release knob	500.9.000.0005.0
	to 5 (7) bar with fine adjustable pressure release valve	500.9.000.1005.0
2941	to -0,8 (-0,9) bar (Vacuum)	500.9.000.9800.0

Accessories:

Type	Description	Order-Code
2950	Carrying case with foams, with cutout for 2 pcs. hand test pumps 2911 and/or 2941, 1 pc. digital manometer series 2000, tubes etc. Dimensions: appr. 350 x 260 x 90 mm	500.9.000.0000.4
Tube	PVC-Tube 4 x 6 mm, (per meter) Special construction with very small volumetric expansion.	500.0.000.9999.9
T-piece	SPARE PART: Quick-coupling T-junction part no. 6832, for tube 4 x 6 mm	500.9.000.0002.0

Options:

Hand Test Pump 2911 or Hand Test Pump 2941 with threaded connection (e.g. 1/2" BSP male).
Hand Test Pump 2911 or Hand Test Pump 2941 for panel mounting, threaded connection (e.g. 1/2" BSP male).
Digital Hand Held Manometer Series 2000 or HMG 1 as reference unit for use as calibration equipment, see datasheet „2000" resp. "HMG 1".

We keep you informed at <http://www.leitenberger.de>



DRUCK & TEMPERATUR Leitenberger GmbH
Bahnhofstr. 33 • D-72138 Kirchentellinsfurt • Germany
Tel.: 0 71 21 - 9 09 20 - 0 • Fax: 0 71 21 - 9 09 20 - 99
E-Mail: dt-info@leitenberger.de • <http://www.leitenberger.de>

