



High Pressure Hose Kit HK1-1000

1,000 bar / 14,500psi working pressure, for oil or water

This new High Pressure Hose Kit is to augment the HTP1 Hydraulik Hand Held Test Pump. It offers a new standard for those involved in high pressure ,on-site' calibration.

The HK1-1000 offers the following:

- ⊕ Self-Sealing hose and fittings - No drips!
- ⊕ Easy finger tight connection.
- ⊕ Very low volumetric expansion.
Negligible pressure drop.
- ⊕ Stainless Steel / Nylon construction.
Suitable for Oil and Water.
- ⊕ Choice of seals available to suit various fluids.




Specification

Length:	1 m
Connection to HTP1:	1/4" BSP male in st. st.
Connection for unit under test:	1/4" BSP male in st.st.
Working pressure:	1000 bar / 14500 psi
Min. Burst pressure:	2500 bar / 36200 psi
Min. Bend radius:	60 mm / 2.36 inch
Working temperature:	-30°C to +80°C / -22°F to +176°F
Construction:	Nylon, Stainless Steel, Brass, PTFE, Nitrile
Outer diameter:	6.9 mm / 0.27 inch
Bore:	3.2 mm / 0.13 inch
Fluids:	Water, Oil as standard, ,Skydrol' or brake fluid version available

Hose Construction:

Schlauch-Aufbau

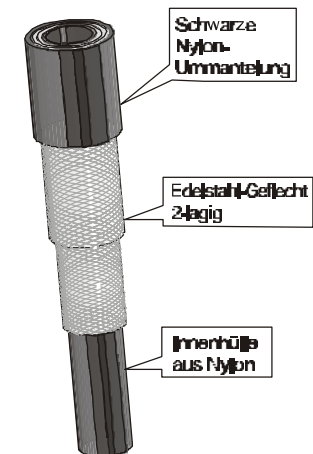

Order Code

210.9.000.1000.0

